

Product Specification

Flexible LED Strip COB Series

10mm FPC COB 768LEDs/M IP20 Flexible LED Strip

WW-FLS103T88FC768B-24(WCP)-LD















HK Office

China Factory

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road

Kwun Tong, Kowloon, Hong Kong

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge, Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel: (852) 3152 3059 (10 lines)

,

Tel: (86) 755 8601 9190

Fax: (852) 3152 3039

9

Fax: (86) 755 8601 9197





Product Features

- High quality FPC, authentic 3M tape;
- Warranty: 3 Years;
- Min. Bending Diameter: Φ60mm;
- Meet (EU) 2019/2020 ErP regulations
- ●Min.Bending Diameter:Φ60mm
- ●Max.length(M):5M



Technology info

• Lighting Technology: LED

Certification Standards

EN55015:2013+A1


EN61547:2009

EN60598-1:2015

EN60598-2-20:2015

EN62493:2015

EN62471:2008





WW-FLS103T88FC768B-24(WCP)-LD

Parameters for non-erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)	3SDCM LED Color Temp.(K) Wavelength(nm)**	Typ. Luminous Flux LM/M(39.37in)	Rated voltage
₽ 20	WW-FLS103T88FC768B- 24(WCP)-LD	1	1	1	6.68	8.02	R	620~630nm	1	168	DC 24V
					2.56	3.07	G	530~540nm	1	316	
					4.16	5.00	В	455~465nm	1	78	
					14.00	16.80	RGB	1	1	562	

Remarks:


- •*The above color temperature is the color temperature of LED source.
- ullet The typ.Luminous flux tolerance range is $\pm 10\%$ (subject to the manufacturer's instrument test).


Test condition of above technical data:

- Surrounding temperature: 26 °C.
- Test while turned on.




Optical Test Diagram

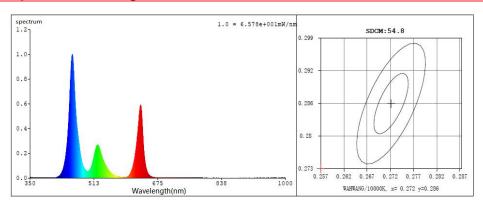



Dimension Drawing




	IP Grade	A. Power cable length	B. Strip length	C. Strip width	D. Unit Length	E. Power cable diameter	F.Strip thickness	G. End cap length	H. End cap width	I. End cap thickness
	B 20	150±10mm	5000±50mm	10±0.5mm	31.22±1mm	φ1.8±0.2mm	1.9±0.5mm	1	1	1
		5.91±0.39in	196.85±1.97in	0.39±0.02in	1.23±0.04in	φ0.07±0.008in	0.075±0.020in	1	1	1

Remarks:

• If you need further information, please contact our sales account manager..

Circuit Diagram

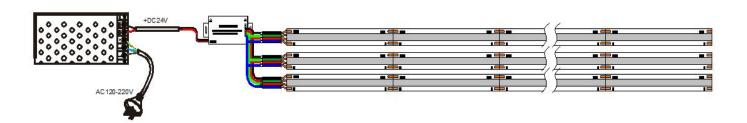




Optional Accessories

IP Grade	Category	Description	Picture	Part No.	Density
	1	1	/	1	1
B 20	1	1	/	1	1
	1	1	1	1	1

Packaging Diagram

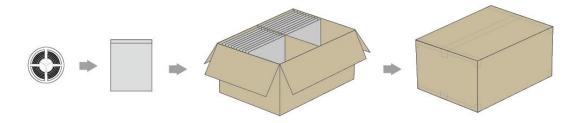


Packaging Information


IP Grade	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton
		Size	Reel/ctn	Size	Reel/ctn		G.VV	volume
B 20	190*210*0.14mm	1		500*230*220mm	60	6.78KG ±10%	7.38 KG ±10%	0.04576 m ³
	7.48*8.28*0.0055 in	1		19.69*9.06 *8.66in	60	14.95 Lbs ±10%	16.27Lbs ±10%	0.897ft ³

Remarks:


• Please contact our sales account manager for customized package (color box, blister etc.)

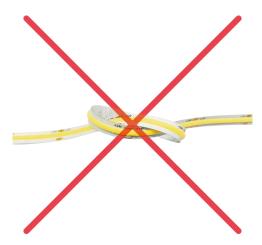


In the process of product installation and use, it is forbidden to knot

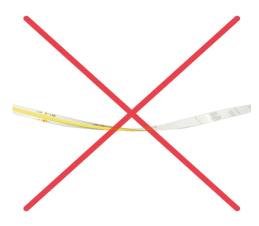

In the process of product installation and use, it is forbidden to twist

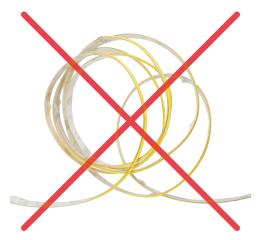

In the process of product installation and use, it is forbidden to wind

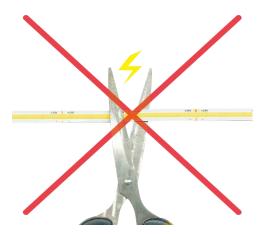

In the process of product installation and use, it is forbidden to cut

- 1. In the process of product installation and use, it is forbidden to reinstall and use.
- 2. It is forbidden to put the product back into the reel after removed from it.





Cautions

















Do not winding



Do not twist



Do not cut when Recommended the continuous







0°C~+60°C (32°F~+140°F)



Operated by professionals





IP Level will change after cutting



Do not pull and crash



Connected to power supply every 5 meters



Power supply must be connected to ground(GND)







Note the positive and negative poles



For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.



For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur、Bromine、Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene xylene methyl acetoacetate Ethyl acetate etc.). The environment in which includes strong acid and strong base.



During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

^{**} If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.

^{**}The right of final interpretation is owned by Dilux.