

Product Specification

Flexible LED Strip COB Series

8mm FPC COB 384LEDs/M IP20 Flexible LED Strip

WW-FLS102T89XX384B-24(WCP)-UR-LD

&
WW-FLS102T89XX384B-24(WCP)-UR-EP-LD















HK Office:

Unit 1901, 19th Floor, NanYang Plaza, No. 57 Hung To Road

Kwun Tong, Kowloon, Hong Kong

China Factory:

Zhiyang Science and Technology Park, 10 Zhiyang Road, Zhangge, Fucheng Street, Longhua District, Shenzhen, Guangdong, China

Tel: (852) 3152 3059 (10 lines)

Fax: (852) 3152 3039

•


Tel: (86) 755 8601 9190

Fax: (86) 755 8601 9197



Product Features

- High quality FPC, authentic 3M tape;
- 3000/4000/6000K three color temperature segments are available for selection;
- Warranty: 3 Years;
- Min. Bending Diameter: Φ60mm;
- Meet (EU) 2019/2020 ErP regulations
- ●Min.Bending Diameter:Φ60mm
- Max.length(M):5M



Technology info

- Lighting Technology: LED
- DLS or NDLS: NDLS
- MLS or NMLS: NMLS

Certification Standards

EN55015:2013+A1

EN61547:2009


EN60598-1:2015

EN60598-2-20:2015

EN62493:2015

EN62471:2008









WW-FLS102T89XX384B-24(WCP)-UR-LD

Parameters for non-erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	LED Color Temp.(K) Wavelength(nm)	3SDCM LED Color Temp.(K) Wavelength(nm)**	Typ. Luminous Flux LM/M(39.37in)	Rated voltage
	WW-FLS102T89WW384B- 24(WCP)-UR-LD						Warm White	3000K	1	882	
B 20	WW-FLS102T89NW384B- 24(WCP)-UR-LD	90	90	100	10	12	Natural White	4000K	1	1042	DC 24V
	WW-FLS102T89SW384B- 24(WCP)-UR-LD						Standard White	6000K	1	1128	

Remarks:

- •*The above color temperature is the color temperature of LED source.
- ullet The typ.Luminous flux tolerance range is $\pm 10\%$ (subject to the manufacturer's instrument test).

Test condition of above technical data:

- Surrounding temperature: 26 ℃.
- Test while turned on.

WW-FLS102T89XX384B-24(WCP)-UR-EP-LD

Parameters for Erp

IP Grade	Model NO.	CRI (Ra)	Rf	Rg	Typical Power (W/M)	Max. Power (W/M)	Color	Temp.(K)	Typ. Luminous Flux LM/M(39.37in)	Lumen/watt	Energy Efficiency class	Rated voltage
	WW-FLS102T89WW384B- 24(WCP)-UR-EP-LD						Warm White	3000K	900	83.22	G	
₿ 20	WW-FLS102T89NW384B- 24(WCP)-UR-EP-LD	90	90	100	10.82	11.34	Natural White	4000K	1064	98.38	F	DC 24V
	WW-FLS102T89SW384B- 24(WCP)-UR-EP-LD						Standard White	6000K	1152	106.52	F	

Remarks:

- •*The above color temperature is the color temperature of LED source.
- While SDCM<3 model is available, part number will add the suffix "-3S".

Test condition of above technical data:

- Surrounding temperature: 26 $^{\circ}$ C.
- Test after 10 mins turned on.


Note:


- According to the new ErP 2019/2020 regulation for each 0.5m or nearest 0.5m strip, the following requirements must be met:
- Measured power≤Pon+5%;
- Measured lumen ≥ Useful luminous flux -10%;
- Measured CRI ≥ Declared CRI-2
- The above technical data, including typical power are based on the test of 0.5m.




~____

Optical Test Diagram

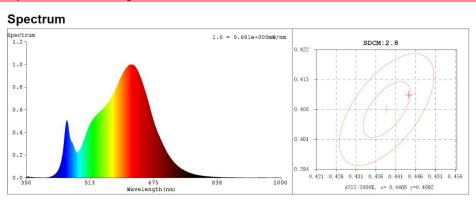



Dimension Drawing

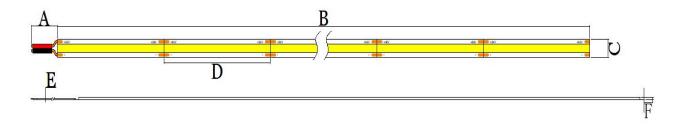


IP Grade	A. Power cable length	B. Strip length	C. Strip width	D. Unit Length	E. Power cable diameter	F.Strip thickness	G. End cap length	H. End cap width	I. End cap thickness
B 20	150±10mm	5000±50mm	8±0.5mm	41.67±1mm	φ1.8±0.2mm	1.9±0.5mm	1	1	1
- 20	5.91±0.39in 196.85±1.97in 0.31±0.02in 1.64±0.04in	φ0.07±0.008in	0.075±0.020in	/	1	/			

Remarks:

• If you need further information, please contact our sales account manager..

Circuit Diagram

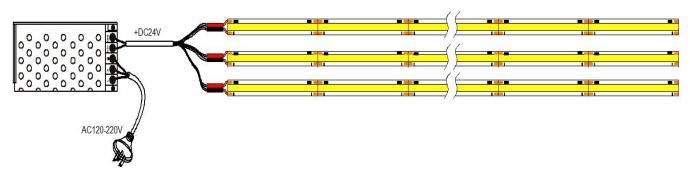




Optional Accessories

IP Grade	Category	Description	Picture	Part No.	Density
	Quick Connector	2PIN Quick Connector		WW-F2B-P0P2T-08(COB)	1
₿ 20	Strip to wire Connector	2PIN Strip to wire Connector		WW-F2B-0WP2T-08(COB)	1
	Strip to strip Connector	rip to strip Connector 2PIN Strip to strip Connector		WW-F2B-PWP2T-08(COB)	1

Packaging Diagram

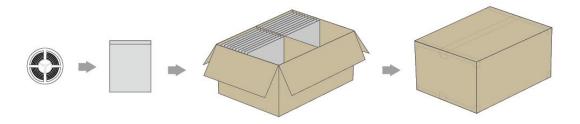


Packaging Information


IP Grade	Bag size	Inner carton		Outer carton		N.W	G.W	Outer carton
		Size	Reel/ctn	Size	Reel/ctn		G.VV	volume
- 20	190*210*0.14mm	1		500*230*220mm	70	6.52KG ±10%	7.12 KG ±10%	0.0253 m ³
₿ 20	7.48*8.28*0.0055 in	1		19.69*9.06 *8.66in	70	14.37 Lbs ±10%	15.70Lbs ±10%	0.897 ft ³

Remarks :


• Please contact our sales account manager for customized package (color box, blister etc.)




In the process of product installation and use, it is forbidden to knot



In the process of product installation and use, it is forbidden to twist



In the process of product installation and use, it is forbidden to wind



In the process of product installation and use, it is forbidden to cut

- 1. In the process of product installation and use, it is forbidden to reinstall and use.
- 2. It is forbidden to put the product back into the reel after removed from it.





A Cautions

















Do not winding



Do not twist



Do not cut when Recommended the continuous







0°C~+60°C (32°F~+140°F)



Operated by professionals





IP Level will change after cutting



Do not pull and crash



Connected to power supply every 5 meters



Power supply must be connected to ground(GND)







Note the positive and negative poles



For cutting LED strip operation, it is necessary to use the standard accessories provided by Dilux (e.g. DC wire, end-cap, front-cap, adhesive, etc.), and according to the correct cutting and connecting method for the installation.



For avoiding LED get vulcanized, LED strip should be installed in the environment where does not has oil and corrosive substances. Such as these substances which contain Sulphur、Bromine、Iodine and Chlorine. Some other chemical elements which will cause Aromatic hydrocarbons releasing(such as: methylbenzene xylene methyl acetoacetate Ethyl acetate etc.). The environment in which includes strong acid and strong base.



During the warranty period, only defective products are acceptable to be replaced by the factory. Factory is not responsible for other expenses because of replacement, such as transportation fee, installation fee, etc..

^{**} If you do not follow the above "Cautions" to operate and result in damaging the product, the factory will not accept maintenance and return.

^{**}The right of final interpretation is owned by Dilux.